


NPN+PNP Transistor

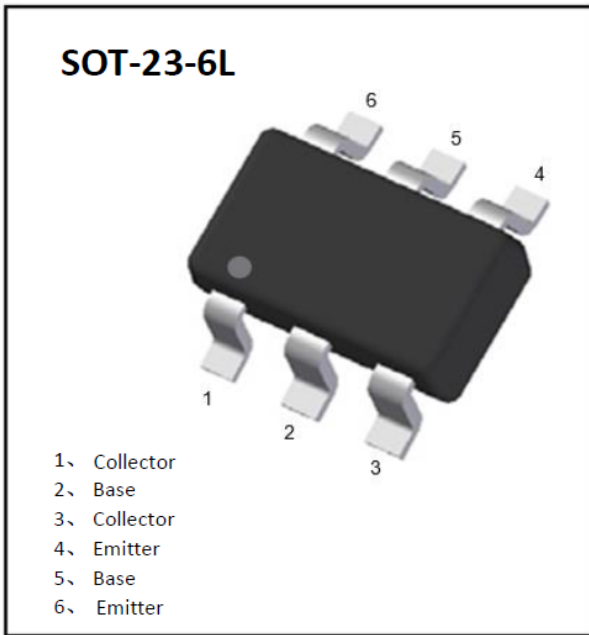


Features

- Epoxy meets UL-94 V-0 flammability rating
- Surface mount package ideally Suited for Automatic Insertion
- NPN+PNP

Mechanical Data

- **Package:** SOT-23-6L
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** N4C

■Equivalent circuit

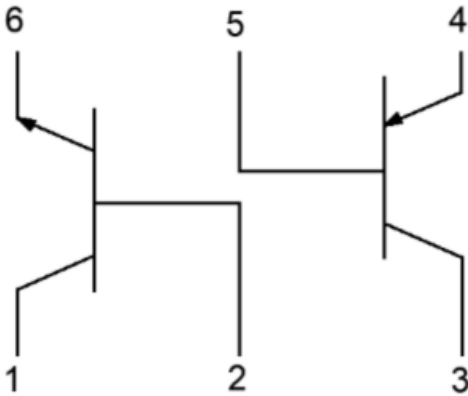

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(mg)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BC817CPN	F2	Approximate 15.6	3000	30000	120000	7" reel



BC817CPN

■ NPN Transistor (Pin1、2、6) Maximum Ratings (Ta=25°C Unless otherwise specified)

Item	Symbol	Unit	Value
Collector-Base Voltage	V_{CBO}	V	50
Collector-Emitter Voltage	V_{CEO}	V	45
Emitter -Base Voltage	V_{EBO}	V	5
Collector Current	I_C	mA	500
Collector Power Dissipation	P_C	mW	330
Operation Junction Temperature	T_j	°C	150
Storage Temperature	T_{stg}	°C	-55 to +150

■ PNP Transistor (Pin3、4、5) Maximum Ratings (Ta=25°C Unless otherwise specified)

Item	Symbol	Unit	Value
Collector-Base Voltage	V_{CBO}	V	-50
Collector-Emitter Voltage	V_{CEO}	V	-45
Emitter -Base Voltage	V_{EBO}	V	-5
Collector Current	I_C	mA	-500
Collector Power Dissipation	P_C	mW	330
Operation Junction Temperature	T_j	°C	150
Storage Temperature	T_{stg}	°C	-55 to +150

■ NPN Transistor (Pin1、2、6) Electrical Characteristics (Ta=25°C unless otherwise specified)

Item	Symbol	Unit	Conditions	MIN	MAX
Collector-Emitter Voltage	V_{CEO}	V	$I_C=10\text{mA}, I_B=0$	45	-
Collector-Base Voltage	V_{CBO}	V	$I_C=10\text{mA}, I_E=0$	50	-
Emitter-Base Voltage	V_{EBO}	V	$I_E=1\text{mA}, I_C=0$	5.0	-
Emitter-base Cut-off Current	I_{EBO}	nA	$V_{EB}=5\text{Vdc}, I_C=0$	-	100
Collector-base Cut-off Current	I_{CBO}	nA	$V_{CB}=20\text{Vdc}, I_E=0$	-	100
DC Current Gain	h_{FE1}		$I_C=100\text{mA}, V_{CE}=1.0\text{Vdc}$	160	400
	h_{FE2}		$I_C=500\text{mA}, V_{CE}=1.0\text{Vdc}$	40	-
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	V	$I_C=500\text{mA}, I_B=50\text{mA}$	-	0.7
Base-Emitter Saturation Voltage	V_{BE}	V	$I_C=500\text{mA}, V_{CE}=1.0\text{Vdc}$	-	1.2
Transition frequency	f_T	MHz	$I_C=10\text{mA}, V_{CE}=5.0\text{V}, f=100\text{MHz}$	100	-




BC817CPN

■PNP Transistor (Pin3、4、5) Electrical Characteristics (Ta=25°C unless otherwise specified)

Item	Symbol	Unit	Conditions	MIN	MAX
Collector-Emitter Voltage*	V_{CE0}	V	$I_C=-10\text{mAdc}$, $I_B=0$	-45	-
Collector-Base Voltage	V_{CBO}	V	$I_C=-10\mu\text{Adc}$, $I_E=0$	-50	-
Emitter-Base Voltage	V_{EBO}	V	$I_E=-1\mu\text{Adc}$, $I_C=0$	-5.0	-
Emitter-base Cut-off Current	I_{EBO}	nA	$V_{EB}=-5\text{Vdc}$, $I_C=0$	-	-100
Collector-base Cut-off Current	I_{CBO}	nA	$V_{CB}=-20\text{Vdc}$, $I_E=0$	-	-100
DC Current Gain	h_{FE1}		$I_C=-100\text{mAdc}$, $V_{CE}=-1.0\text{Vdc}$	160	400
	h_{FE2}		$I_C=-500\text{mAdc}$, $V_{CE}=-1.0\text{Vdc}$	40	-
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	V	$I_C=-500\text{mAdc}$, $I_B=-50\text{mAdc}$	-	-0.7
Base-Emitter Saturation Voltage	V_{BE}	V	$I_C=-500\text{mAdc}$, $V_{CE}=-1.0\text{Vdc}$	-	-1.2
Transition frequency	f_T	MHz	$I_C=-10\text{mA}$, $V_{CE}=-5.0\text{V}$, $f=100\text{MHz}$	100	-


■ NPN Transistor (Pin1、2、6) Characteristics (Typical)

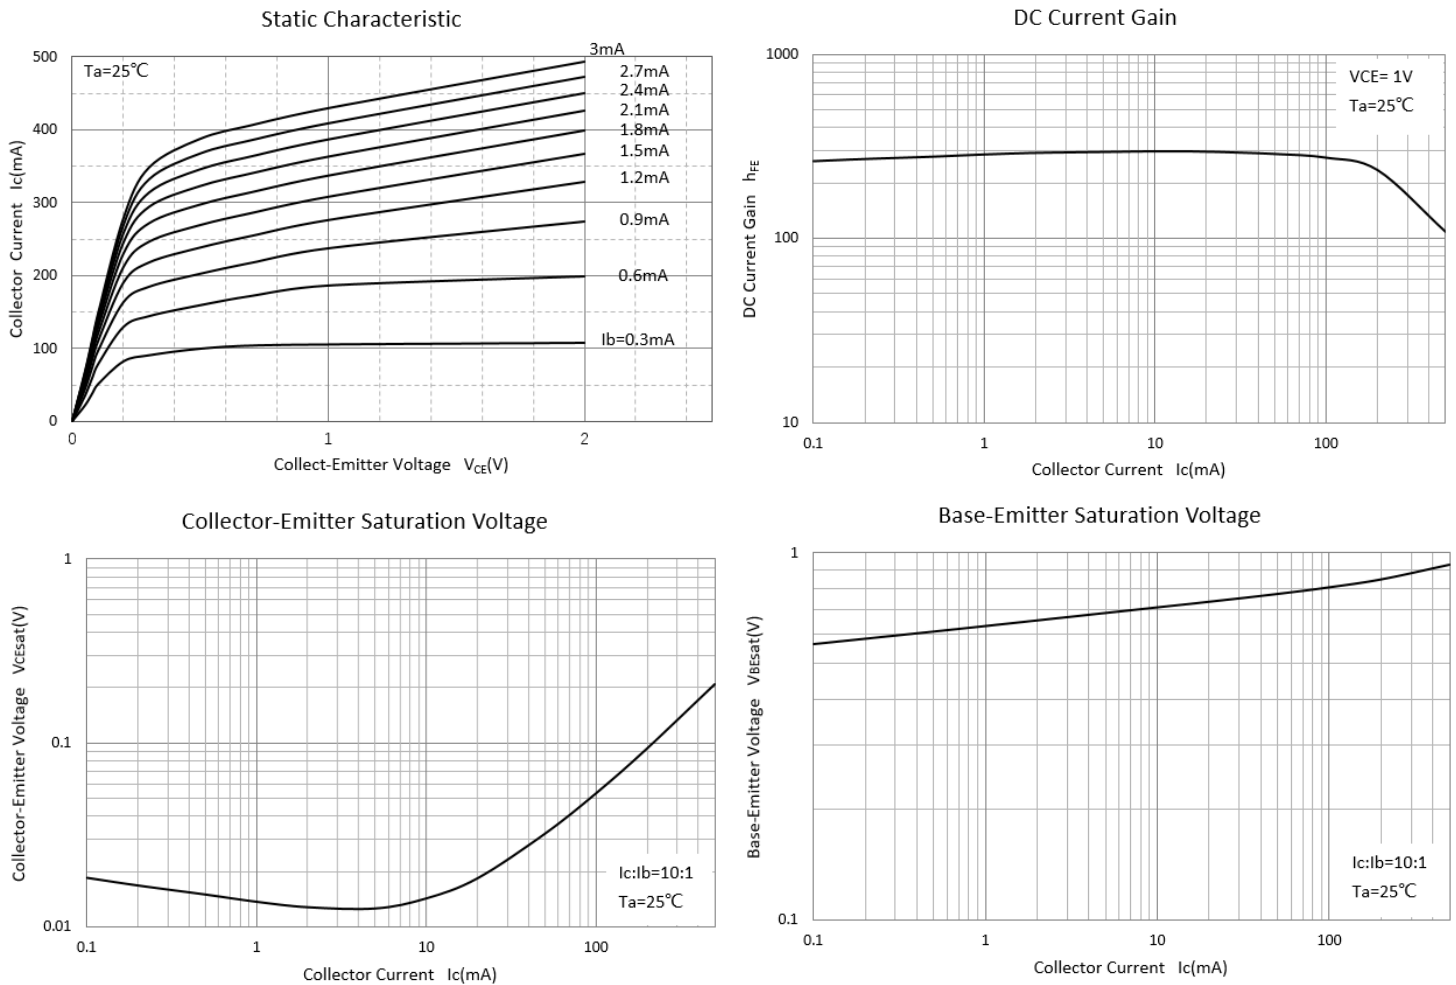




BC817CPN

Base-Emitter On Voltage

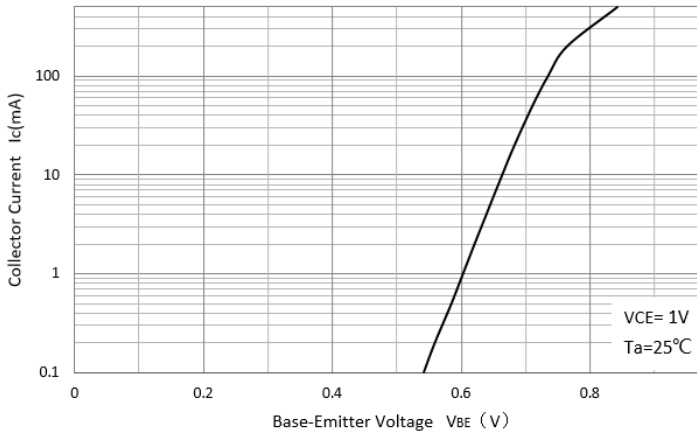


Cob/Cib-VCE/VEB

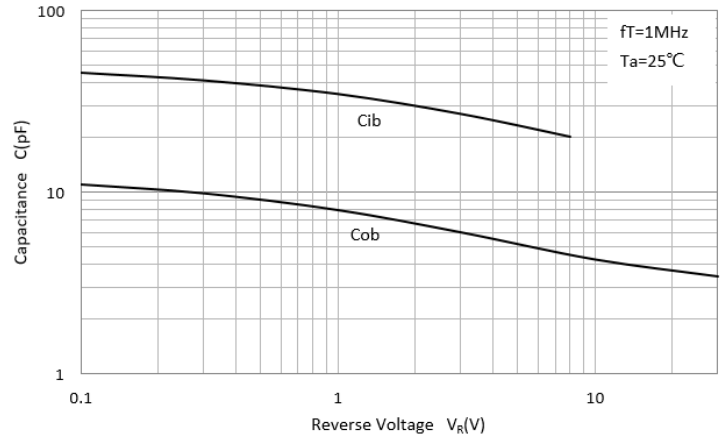


■ PNP Transistor (Pin3、4、5) Characteristics (Typical)


Static Characteristic

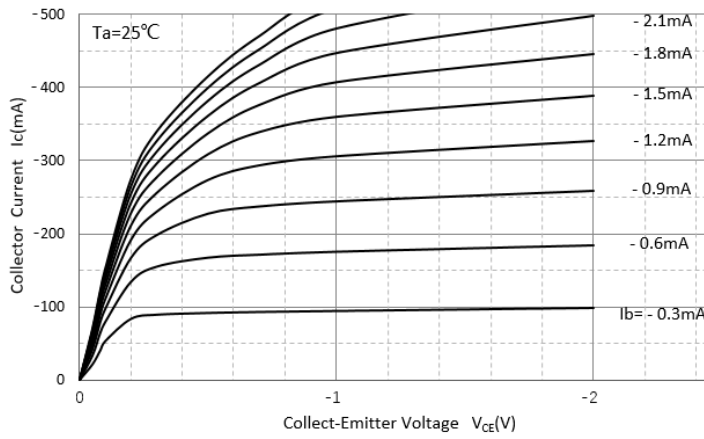


DC Current Gain

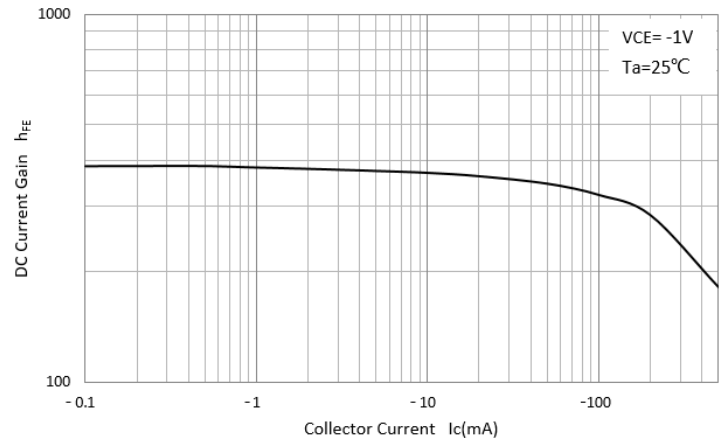

Collector-Emmitter Saturation Voltage

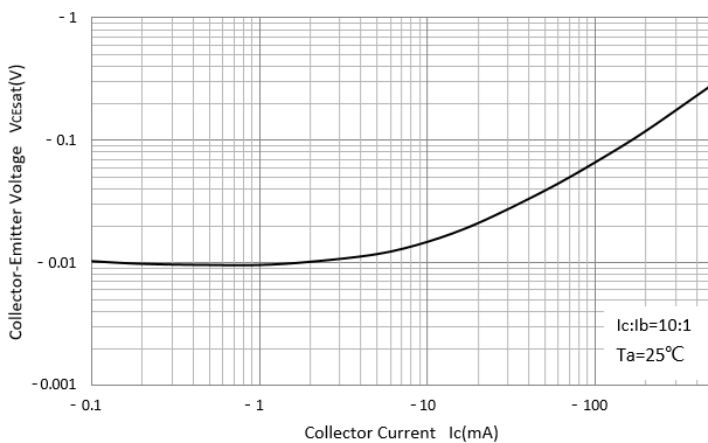


Base-Emmitter Saturation Voltage

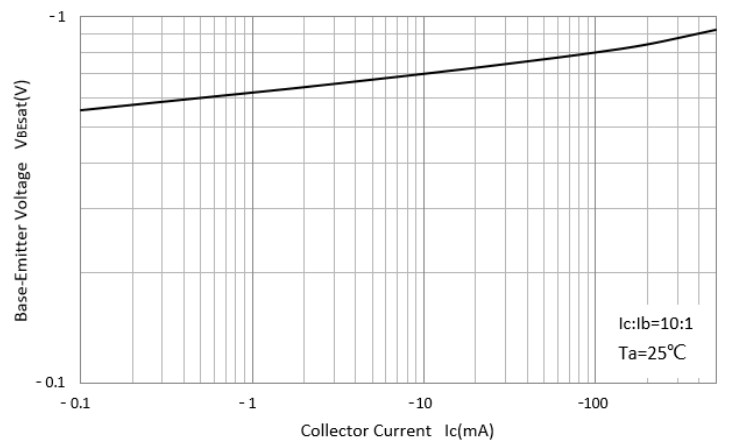




BC817CPN



Base-Emitter On Voltage

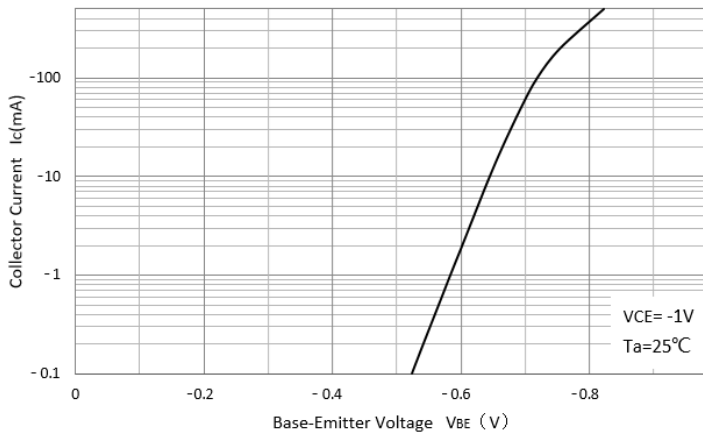


$C_{ob}/C_{ib}-V_{CB}/V_{EB}$

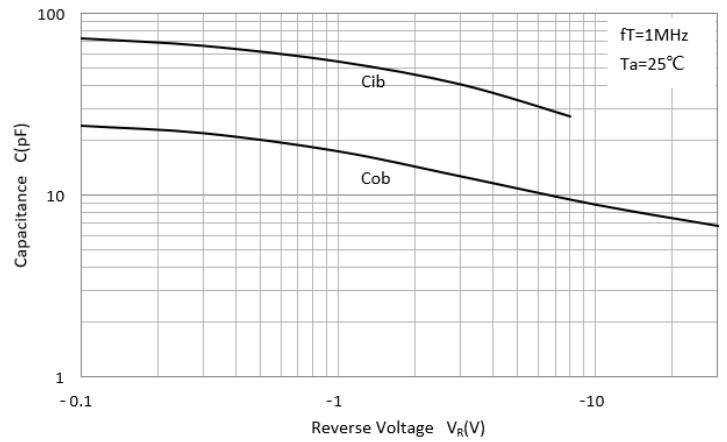


■SOT-23-6L Package information

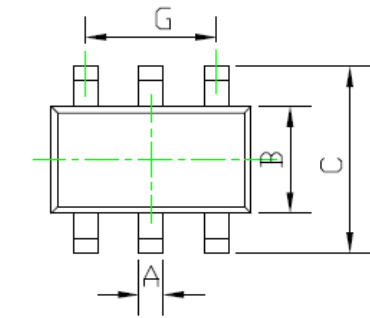

SIDE VIEW



SIDE VIEW

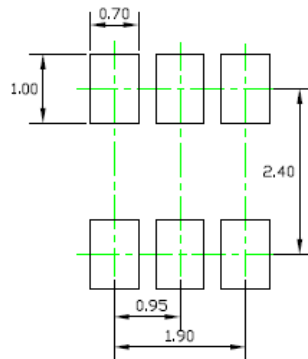

Suggested Solder Pad Layout

Note:
 1,Controlling dimension in millimeters,
 2,General tolerance:±0.05mm,
 3.The pad layout is for reference purposes only.

DIMENSIONS				
SYMBOL	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.012	0.020	0.300	0.500
B	0.059	0.067	1.500	1.700
C	0.104	0.116	2.650	2.950
D	0.037BSC		0.950BSC	
G	0.075BSC		1.900BSC	
H	0.111	0.119	2.820	3.020
J	0.000	0.004	0.000	0.100
K	0.041	0.045	1.050	1.150
L	0.012	0.024	0.300	0.600
M	0.004	0.008	0.100	0.200
e	0°	8°	0°	8°



BC817CPN

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.