





Surface Mount Transient Voltage Suppressor

Uni-directional



Bi-directional



Features

- For surface mounted applications
- Low-profile package
- Ideal for automated placement
- Available in Unidirectional
- 400 W peak pulse power capability with a 10/1000 μ s waveform
- Low incremental surge resistance, excellent clamping capability
- Very fast response time
- High temperature soldering guaranteed: 260 °C/10 s at terminals
- Meets MSL level 1
- ESD protection of data lines in accordance with IEC 61000-4-2, 30kV(Air), 30kV (Contact)
- Part no. with suffix "Q" means AEC-Q101 qualified

Typical Applications

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive and telecommunication.

Mechanical Date

- **Package:** SOD-123FL
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** For uni-directional types the band denotes cathode end, no marking on bi-directional types

■Maximum Ratings (T_A=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Conditions	Max
Peak power dissipation ⁽¹⁾ (2) (Fig.1)	P _{PPM}	W	with a 10/1000us waveform	400
Peak pulse current ⁽¹⁾	I _{PPM}	A	with a 10/1000us waveform	(See Next Table)
Power dissipation, on infinite heat sink	P _D	W	T _A =25°C	1
Peak forward surge current, 8.3 ms single ⁽³⁾	I _{FSM}	A	8.3 ms single half sine-wave	30
Operating junction and	T _J	°C	-	-55 to +175
Storage temperature range	T _{STG}	°C	-	-55 to +175
Thermal resistance	R _{θJL}	°C/W	Between junction and lead	30
	R _{θJA}		Between junction and ambient	150
	R _{θJC}		Between junction and curve	50

Notes:

- (1). Non-repetitive current pulse at T_J=25°C, per waveform of Fig2. and derated per Fig.3.
- (2). T_L=30°C unless otherwise noted, VF ≤1.25V@200mA.
- (3). Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum
- (4). Mounted on 0.31 x 0.35" (8.0 x 9.0 mm) copper pads to each terminal



SM4F SERIES

■ Electrical Characteristics (Ta=25°C unless otherwise noted)

Part Number		Breakdown Voltage $V_{BR}@I_T$			Maximum Reverse Leakage I_R @ V_{RWM} (μA)	Working Peak Reverse Voltage V_{RWM} (V)	Maximum Reverse Surge Current I_{PP} ⁽²⁾ (A)	Maximum Clamping Voltage V_C @ I_{PP} (V)
(Uni)	(Bi)	Min(V)	Max (V)	I_T ⁽¹⁾ (mA)				
SM4F6.0AQ	SM4F6.0CAQ	6.67	7.37	10	800	6.0	38.8	10.3
SM4F6.5AQ	SM4F6.5CAQ	7.22	7.98	10	500	6.5	35.7	11.2
SM4F7.0AQ	SM4F7.0CAQ	7.78	8.60	10	200	7.0	33.3	12.0
SM4F7.5AQ	SM4F7.5CAQ	8.33	9.21	1	100	7.5	31.0	12.9
SM4F8.0AQ	SM4F8.0CAQ	8.89	9.83	1	50	8.0	29.4	13.6
SM4F8.5AQ	SM4F8.5CAQ	9.44	10.40	1	10	8.5	27.8	14.4
SM4F9.0AQ	SM4F9.0CAQ	10.00	11.10	1	5	9.0	26.0	15.4
SM4F10AQ	SM4F10CAQ	11.10	12.30	1	2.5	10.0	23.5	17.0
SM4F11AQ	SM4F11CAQ	12.20	13.50	1	2.5	11.0	22.0	18.2
SM4F12AQ	SM4F12CAQ	13.30	14.70	1	2.5	12.0	20.1	19.9
SM4F13AQ	SM4F13CAQ	14.40	15.90	1	1.0	13.0	18.6	20.0
SM4F14AQ	SM4F14CAQ	15.60	17.20	1	1.0	14.0	17.2	23.2
SM4F15AQ	SM4F15CAQ	16.70	18.50	1	1.0	15.0	16.4	24.4
SM4F16AQ	SM4F16CAQ	17.80	19.70	1	1.0	16.0	15.4	26.0
SM4F17AQ	SM4F17CAQ	18.90	20.90	1	1.0	17.0	14.5	27.6
SM4F18AQ	SM4F18CAQ	20.00	22.10	1	1.0	18.0	13.7	29.2
SM4F19AQ	SM4F19CAQ	21.10	23.30	1	1.0	19.0	13.1	30.6
SM4F20AQ	SM4F20CAQ	22.20	24.50	1	1.0	20.0	12.3	32.4
SM4F22AQ	SM4F22CAQ	24.40	26.90	1	1.0	22.0	11.3	35.5
SM4F24AQ	SM4F24CAQ	26.70	29.50	1	1.0	24.0	10.3	38.9
SM4F26AQ	/	28.90	31.90	1	1.0	26.0	9.5	42.1
SM4F28AQ	/	31.10	34.40	1	1.0	28.0	8.8	45.4
SM4F30AQ	/	33.30	36.80	1	1.0	30.0	8.3	48.4
SM4F33AQ	/	36.70	40.60	1	1.0	33.0	7.5	53.3
SM4F36AQ	/	40.00	44.20	1	1.0	36.0	6.9	58.1
SM4F40AQ	/	44.40	49.10	1	1.0	40.0	6.2	64.5
SM4F43AQ	/	47.80	52.80	1	1.0	43.0	5.8	69.4
SM4F45AQ	/	50.00	55.30	1	1.0	45.0	5.5	72.7
SM4F48AQ	/	53.30	58.90	1	1.0	48.0	5.2	77.4
SM4F51AQ	/	56.70	62.70	1	1.0	51.0	4.9	82.4
SM4F54AQ	/	60.00	66.30	1	1.0	54.0	4.6	87.1
SM4F58AQ	/	64.40	71.20	1	1.0	58.0	4.3	93.6
SM4F60AQ	/	66.70	73.70	1	1.0	60.0	4.1	96.8
SM4F64AQ	/	71.10	78.60	1	1.0	64.0	3.9	103.0
SM4F70AQ	/	77.80	86.00	1	1.0	70.0	3.5	113.0
SM4F75AQ	/	83.30	92.10	1	1.0	75.0	3.3	121.0
SM4F78AQ	/	86.70	95.80	1	1.0	78.0	3.2	126.0
SM4F80AQ	/	88.80	97.60	1	1.0	80.0	3.1	129.0
SM4F85AQ	/	94.40	104.00	1	1.0	85.0	2.9	137.0
SM4F90AQ	/	100.00	111.00	1	1.0	90.0	2.7	146.0
SM4F100AQ	/	111.00	123.00	1	1.0	100.0	2.5	162.0

Notes:

(1) $t_p \leq 50ms$ Pulse test: $t_p \leq 50ms$.

(2) Surge current waveform per Fig. 2 and derated per Fig.3.



SM4F SERIES

■ Characteristics(Typical)

Fig.1 Peak Pulse Power Rating Curve

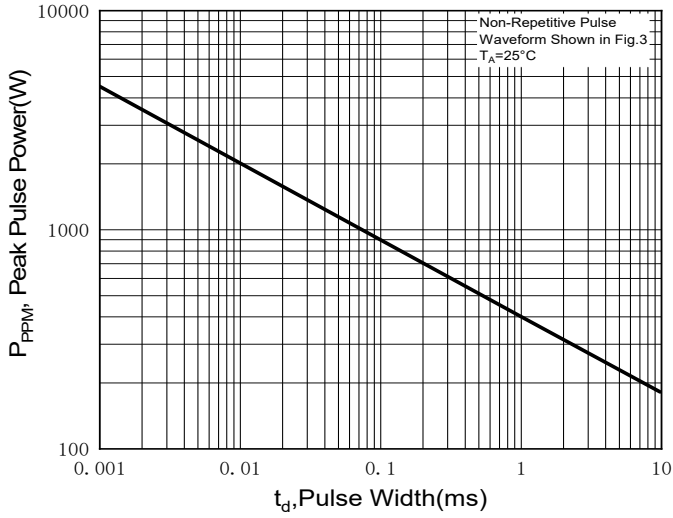


Fig.2 Pulse Waveform

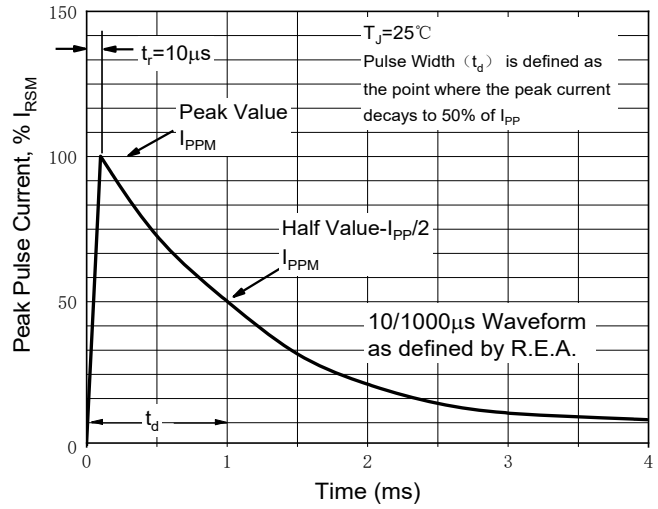


Fig.3 Pulse Power or Current vs. Initial Junction Temperature

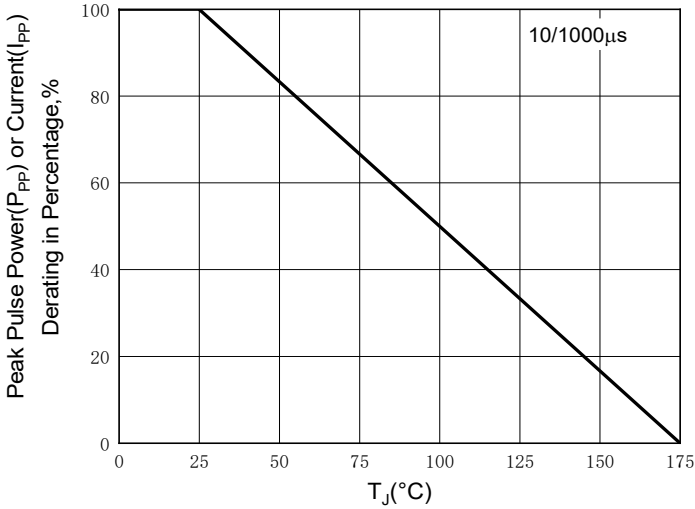


Fig.4 Maximum Non-Repetitive Forward Surge Current

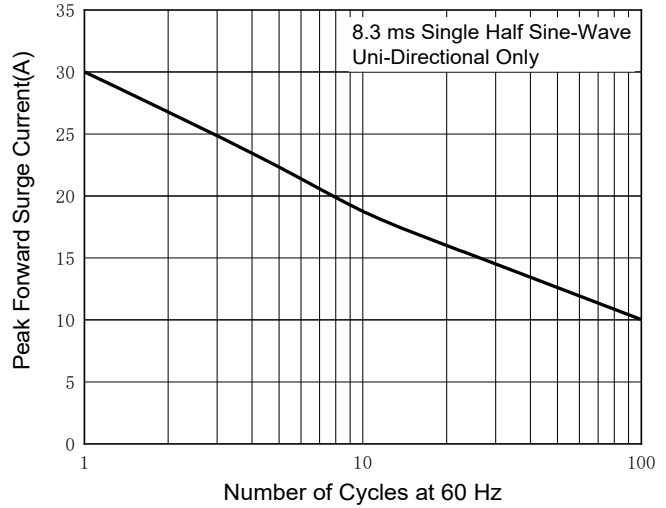


Fig.5 Typical Junction Capacitance


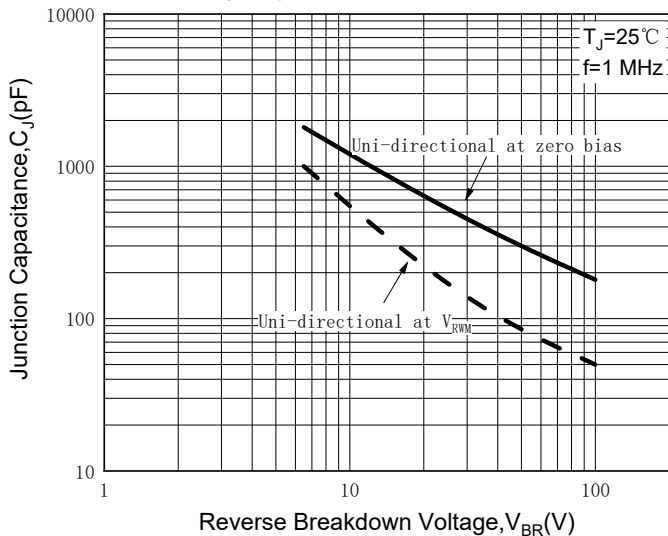


Fig.6 Steady State Power Derating Curve



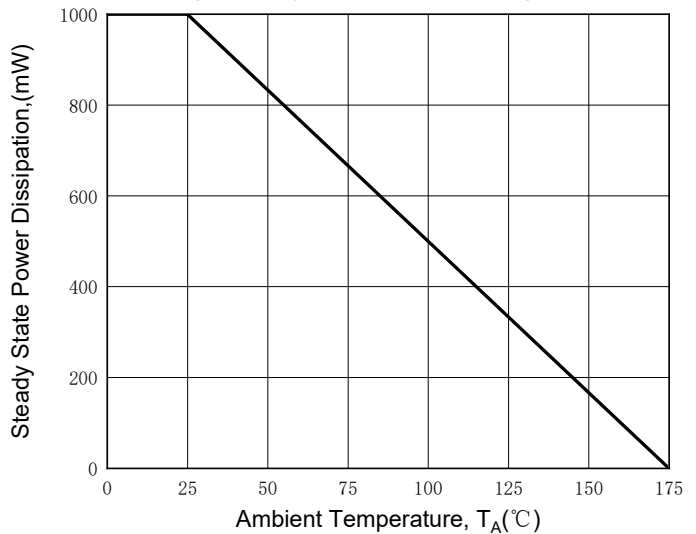


SM4F SERIES

Ordering Information (Example)


PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SM4F SERIES	F1	0.0177	3000	30000	120000	7" reel

Marking Information

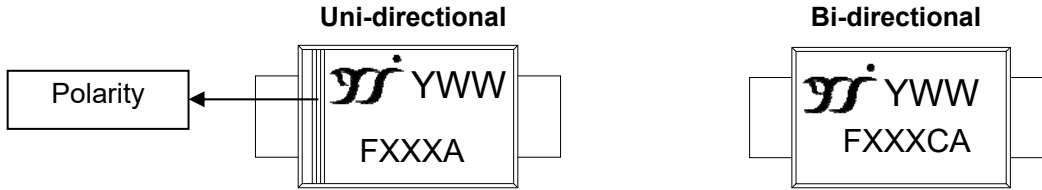


Note:
 1. All marking is at middle of the product body
 2. All marking is in laser printing
 3. XXX is marking code, like 6.0A/6.0CA marking code is 6.0
 4. Body color: Black
 5. YWW is date code, "Y" is year. "WW" is week.
 For instance:
 The 17th week of 2022, date code is 217
 The 17th week of 2023, date code is 317

Outline Dimensions

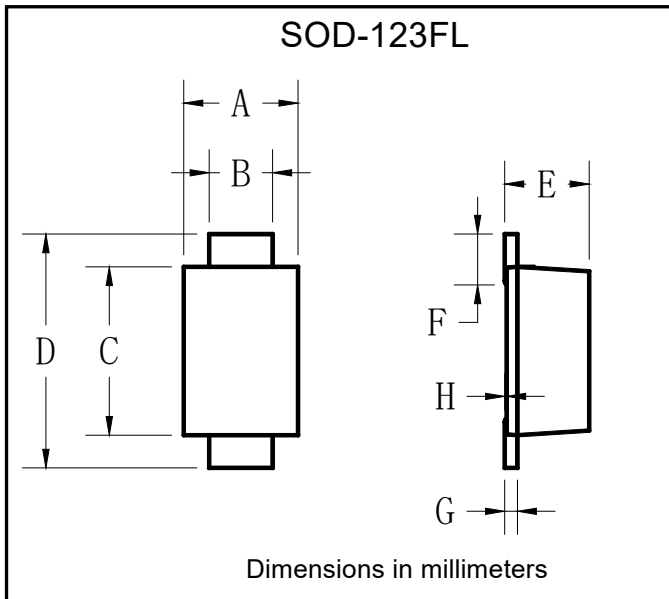

SOD-123FL		
Dim	Min	Max
A	1.60	1.90
B	0.90	1.10
C	2.55	2.85
D	3.60	3.90
E	1.00	1.20
F	0.40	0.90
G	0.10	0.25
H	0.02	0.05

Suggested pad layout

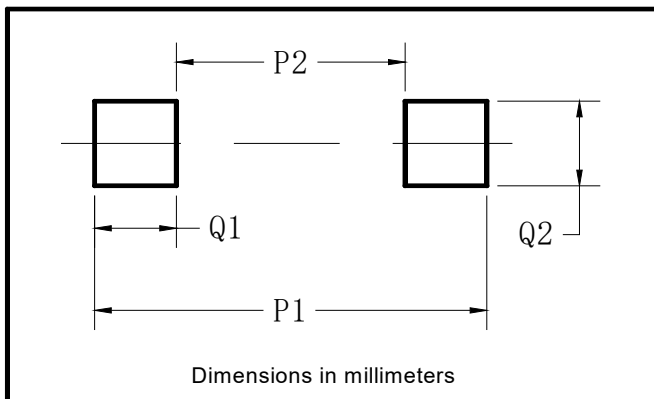

SOD-123FL	
Dim	Millimeters
P1	3.90
P2	1.90
Q1	1.00
Q2	1.50



SM4F SERIES

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, lifesaving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.